



Sliding cover light design

Type SAL 102 R

- Load 1.5 t axle load
- Flush with the hall floor
- Control via operating element installed in the hall area
- Work on various different levels possible
- The sliding cover complies with the requirements of DGUV 109
- Optimum safety for your employees
- TÜV type-tested and certified system
- ISO 9001:2015 certified production facility
- DIN EN 1090 certified production facility
- Various patents have been granted
- Top product quality
- Top quality, made in Germany

The benefit for you: Optimum accident prevention

- System available as a storage variant
- Aluminium design
- Non-slip surface
- Stainless steel chain elements

We have the solution to every challenge. Let one of our specialists offer you individual advice on your project.

Technical description

Axle load: 1.5 t

Traffic load: in accordance with SLW 60, DIN EN 1991-1-1:2010-12, DIN EN 1991-1-1 /NA:2010-12, DIN Technical Report 101:2009-03 and DIN 4085 Supplement 1:2011-12


Length: according to customer requirements

Inside width: 1.02 m in clearance

Working width: 1.62 m in clearance

Standing height: according to customer requirements



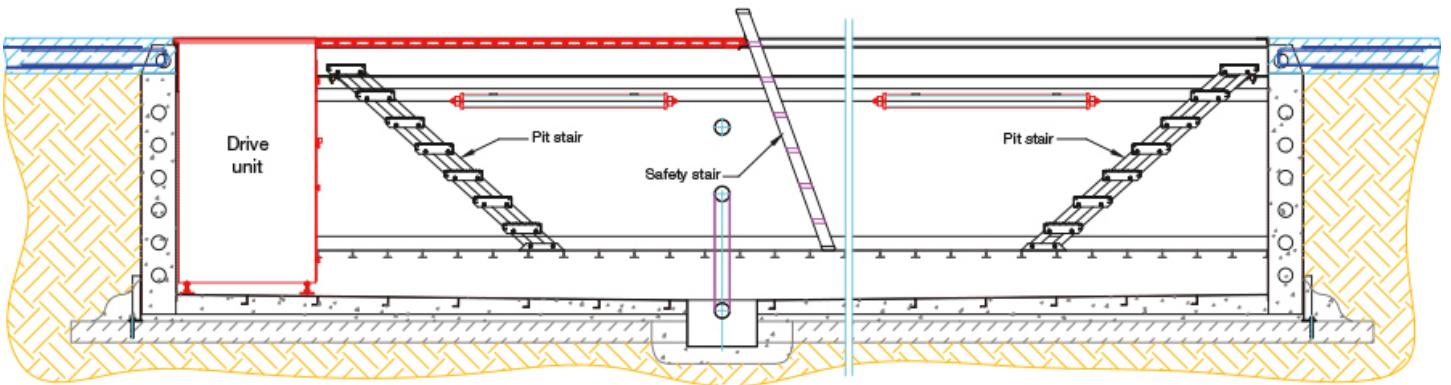

Balzer GmbH & Co. KG
Zeissweg 9
87700 Memmingen
Phone: +49 (0)8331 99041-0
info@balzer-mm.de

Prefabricated assembly pits
Umweltgrube®
Sliding covers
Rail vehicle pits

www.balzer-mm.de